


Serie | 6, Domino induction hob, 30 cm
PIB375FB1E

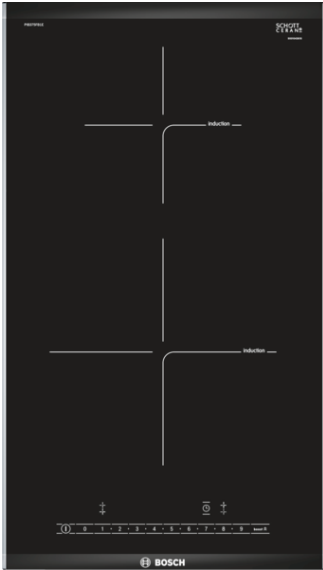

Optional accessories
HEZ390090 : Wok Set consisting of 3 Items
HEZ394301 : Connecting strip

The induction hob: cook fast, clean and safely while using very little energy.

- **DirectSelect:** Direct, simple selection of the desired cooking zone, power and additional functions.
- **ComfortProfile:** Elegant, appealing design with bevelled front and metal strips on the side.
- **Timer with switch-off function:** Turns off the assigned cooking zone after the set time.
- **30 cm width:** suitable for combining with other Domino and ComfortProfile hobs.
- **PowerBoost:** Up to 50% more power for faster heating.
- **Induction:** Fast, precise cooking, easy cleaning and low energy consumption.

Technical Data

Product name/family :	Vario/Domino cooking zone cera
Built-in / Free-standing :	CONSTR_TYPE.Built-in
Energy input :	Electric
Total number of positions that can be used at the same time :	2
Required niche size for installation (HxWxD) :	51 x 270 x 490-500
Width of the product (mm) :	306
Dimensions of the product (mm) :	51 x 306 x 527
Dimensions of the packed product (HxWxD) (mm) :	110 x 370 x 573
Net weight (kg) :	6.858
Gross weight (kg) :	7.5
Basic surface material :	Ceramic
Color of surface :	Alu, brushed, Black
Approval certificates :	AENOR, CE
Length electrical supply cord (cm) :	110
Electrical connection rating (W) :	3700
Voltage (V) :	220-240
Frequency (Hz) :	50; 60



Serie | 6, Domino induction hob, 30 cm PIB375FB1E

The induction hob: cook fast, clean and safely while using very little energy.

Cooking Zone

- 2 Induction cooking zones
- Variable 17-stage power settings for each zone
- Cooking zones: 1 x Ø 145 mm, 1.4 KW (max. Power level 2200 W) Induction 1 x Ø 210 mm, 2.2 KW (max. Power level 3700 W) Induction

Design

- Comfort profile (ceramic front facette with stainless steel side trim)
- Can be combined with other A01 hobs
- DirectSelect touch control panel


Key Functions

- Switch off timer for every cooking zone Timer Count-up timer
- Automatic pan recognition sensor PowerManagement
Function Safety switch-off Childproof lock
- QuickStart Function
- ReStart Function
- 2 stage residual heat indicator

Dimensions


- Dimensions of the product (HxWxD mm) : 51 x 306 x 527
- Length of main cable: 110 cm
- Electrical connection rating: 3700 W
- Required niche size for installation (HxWxD mm) : 51 x 270 x 490-500

Serie | 6, Domino induction hob, 30 cm PIB375FB1E

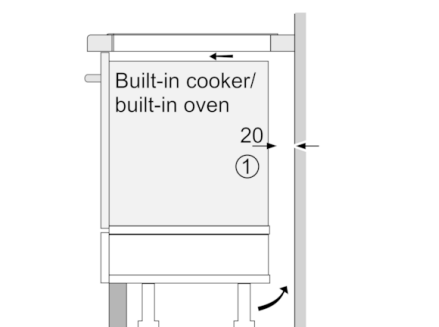


①
Ventilation gap must
be present.

Measurements in mm

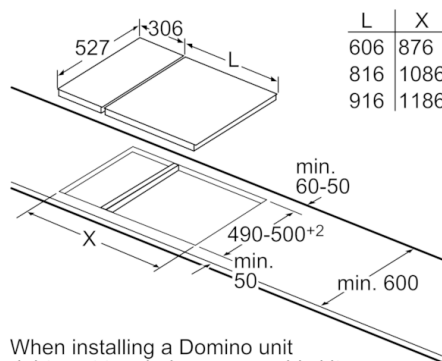


When installing a Domino unit
right next to a hob, an assembly kit
(HEZ394301) is required.

Measurements in mm

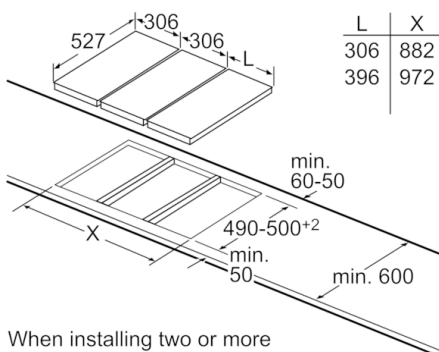


When installing two or more
Domino units side-by-side, one or more
assembly kits are required (2 units =
1 assembly kit, 3 units = 2 assembly kits, etc).


Measurements in mm

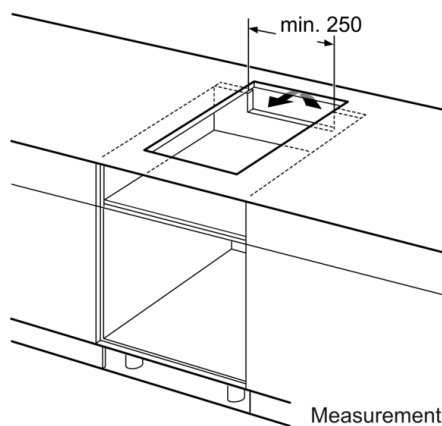

Measurements
in mm

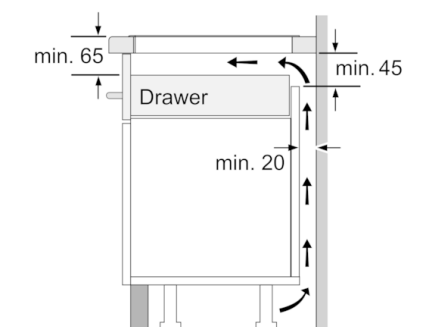

Measurements in mm

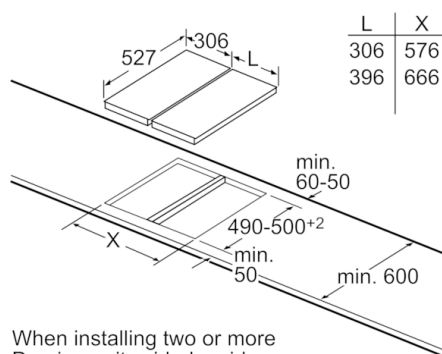


When installing two or more
Domino units side-by-side, one or more
assembly kits are required (2 units =
1 assembly kit, 3 units = 2 assembly kits, etc).

Measurements in mm


Serie | 6, Domino induction hob, 30 cm PIB375FB1E

Assembly kit (HEZ394301)
for Domino

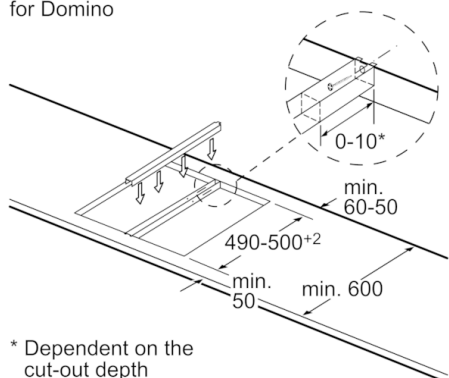

* Dependent on the
cut-out depth


Measurements in mm

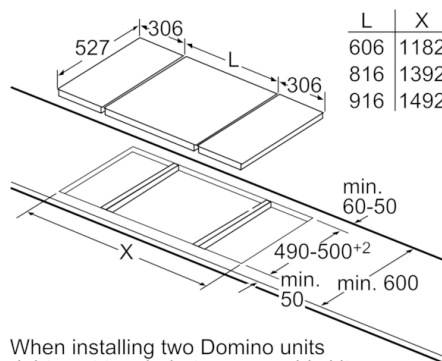

When installing two Domino units
right next to a hob, two assembly kits
(HEZ394301) are required.

Measurements in mm


Picture for the table Domino combination possibilities
with corresponding devices and cutout dimensions

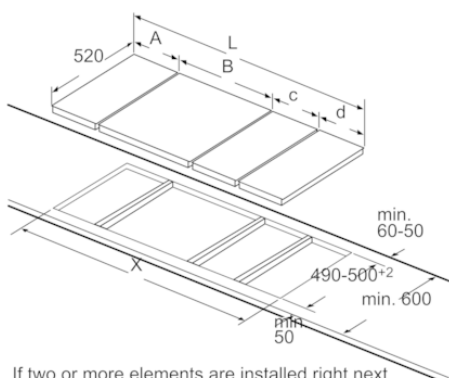

If two or more elements are installed right next
to one another, one or several installation kits are
required (2 elements 1 installation kit,
3 elements 2 installation kits, etc.).

Cutout dimension (X) depending on the combination
see table:

measurements in mm

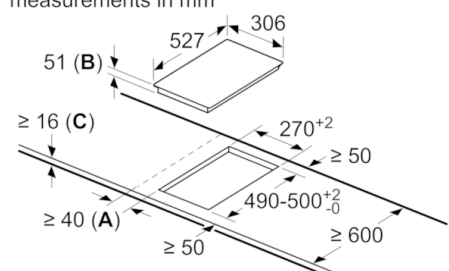

A: Minimum distance from the hob cut-out
to the wall.
B: Recessed depth
C: With fitted oven underneath min. 30,
possibly more; see space requirements
for the oven.

measurements in mm
Domino combination options with
corresponding appliance and cut-out dimensions

Width category:
Appliance width:

	A	B	C	D	L	X
2x30	306	306	-	-	612	576
1x30, 1x40	306	396	-	-	702	666
1x30, 1x60	306	606	-	-	912	876
1x30, 1x70*	306	710	-	-	1016	980
1x30, 1x80	306	816	-	-	1122	1086
1x30, 1x90	306	916	-	-	1222	1186
2x40	396	396	-	-	792	756
1x40, 1x60	396	606	-	-	1002	966
1x40, 1x70*	396	710	-	-	1106	1070
1x40, 1x80	396	816	-	-	1212	1176
1x40, 1x90	396	916	-	-	1312	1276
3x30	306	306	306	-	918	882
2x30, 1x40	306	306	396	-	1008	972
2x30, 1x60	306	306	606	-	1218	1182
2x30, 1x70*	306	306	710	-	1322	1286
2x30, 1x80	306	306	816	-	1428	1392
2x30, 1x90	306	306	916	-	1528	1492
1x30, 2x40	306	396	396	-	1098	1062
1x30, 1x40, 1x60	306	396	606	-	1308	1272
1x30, 1x40, 1x70*	306	396	710	-	1412	1376
1x30, 1x40, 1x80	306	396	816	-	1518	1482
1x30, 1x40, 1x90	306	396	916	-	1618	1582
2x40, 1x60	396	396	606	-	1398	1362
4x30	306	306	306	306	1224	1188
3x30, 1x40	306	306	306	396	1314	1278
1x30, 1x75	306	750	-	-	1056	1020
1x40, 1x75	396	750	-	-	1146	1110
2x30, 1x75	306	306	750	-	1362	1326
1x30, 1x40, 1x75	306	396	750	-	1452	1416

* Not possible with 70 cm induction hob